

Separation Distances in Source-Sink Patterns in the Complex Ginzburg-Landau Equation

Jonathan A. Sherratt

Department of Mathematics
& Maxwell Institute for Mathematical Sciences

Heriot-Watt University

PANDA, University of Bath, June 10, 2011

This talk can be downloaded from my web site

`www.ma.hw.ac.uk/~jas`

This work is in collaboration with:

Matthew Smith

(Microsoft Research
Ltd., Cambridge)



Jens Rademacher

(CWI, Amsterdam)



Outline

- 1 Wavetrains in the CGLE
- 2 Solutions in the Unstable Parameter Regime
- 3 Sources and Sinks
- 4 Analytical Study of Source-Sink Patterns
- 5 Conclusions

Outline

- 1 Wavetrains in the CGLE
- 2 Solutions in the Unstable Parameter Regime
- 3 Sources and Sinks
- 4 Analytical Study of Source-Sink Patterns
- 5 Conclusions

The Complex Ginzburg-Landau Equation

I consider a generic oscillator model, the complex Ginzburg-Landau equation:

$$A_t = (1 + ib)A_{xx} + A - (1 + ic)|A|^2 A.$$

I will look exclusively at $b = 0$. Then writing


$$A(x, t) = e^{-iat}[u(x, t) + iv(x, t)]$$

gives a reaction-diffusion system of “ λ - ω ” type:

$$\frac{\partial u}{\partial t} = \frac{\partial^2 u}{\partial x^2} + (1 - r^2)u - (a + cr^2)v$$

$$\frac{\partial v}{\partial t} = \frac{\partial^2 v}{\partial x^2} + (a + cr^2)u + (1 - r^2)v$$

$$\text{where } r = \sqrt{u^2 + v^2}$$



Amplitude and Phase Equations

To study these equations, it is helpful to use the variables $r(x, t) = \sqrt{u^2 + v^2}$ and $\theta(x, t) = \tan^{-1}(v/u)$, giving

$$\begin{aligned} r_t &= r_{xx} - r\theta_x^2 + r(1 - r^2) \\ \theta_t &= \theta_{xx} + \frac{2r_x\theta_x}{r} + a - cr^2 \end{aligned}$$

There is a family of wavetrain solutions ($0 < r^* < 1$):



$$\begin{aligned} &\left\{ \begin{array}{l} r = r^* \\ \theta = \left[(a + cr^{*2})t \pm \sqrt{(1 - r^{*2})}x \right] \end{array} \right\} \\ \Leftrightarrow &\left\{ \begin{array}{l} u = r^* \cos \left[(a + cr^{*2})t \pm \sqrt{(1 - r^{*2})}x \right] \\ v = r^* \sin \left[(a + cr^{*2})t \pm \sqrt{(1 - r^{*2})}x \right] \end{array} \right\} \end{aligned}$$

Wavetrain Generation by Dirichlet Bndy Conditions

I consider these equations
subject to $u = v = 0$ at $x = 0$

Wavetrain Generation by Dirichlet Bndy Conditions

I consider these equations
subject to $u = v = 0$ at $x = 0$

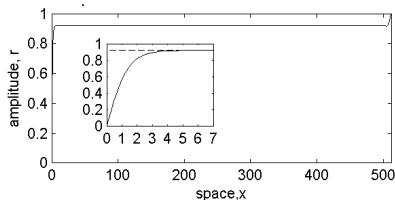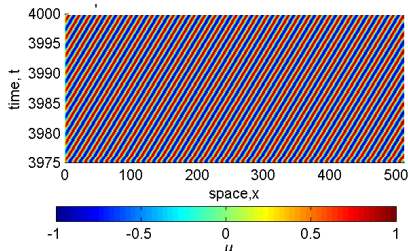

Wavetrain Generation by Dirichlet Bndy Conditions

Conclusion


Dirichlet boundary conditions
generate a wavetrain

$$R(x) = R^* \tanh(x/\sqrt{2})$$

$$\Psi(x) = \Psi^* \tanh(x/\sqrt{2})$$

$$R^* = \left\{ \frac{1}{2} \left[1 + \sqrt{1 + \frac{8}{9} c^2} \right] \right\}^{-1/2}$$

$$\Psi^* = -\text{sign}(c) (1 - R^{*2})^{1/2}$$

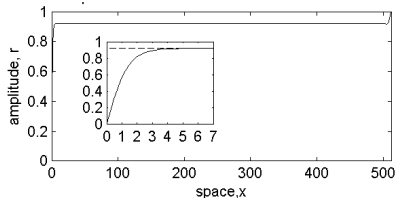

Wavetrain Generation by Dirichlet Bndy Conditions

Conclusion

Dirichlet boundary conditions
generate a wavetrain

$$R(x) = R^* \tanh(x/\sqrt{2})$$

$$\psi(x) = \psi^* \tanh(x/\sqrt{2})$$

$$R^* = \left\{ \frac{1}{2} \left[1 + \sqrt{1 + \frac{8}{9} c^2} \right] \right\}^{-1/2}$$

$$\psi^* = -\text{sign}(c)(1 - R^{*2})^{1/2}$$

The wavetrain of amplitude R^*
is stable $\Leftrightarrow |c| < 1.110468 \dots$



What happens when
 $|c| > 1.110468 \dots$?

Outline

- 1 Wavetrains in the CGLE
- 2 Solutions in the Unstable Parameter Regime
- 3 Sources and Sinks
- 4 Analytical Study of Source-Sink Patterns
- 5 Conclusions



Two Types of Solution

- There are two types of solution for $|c| > 1.110468\dots$

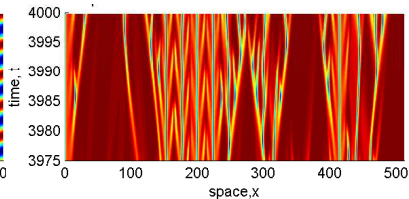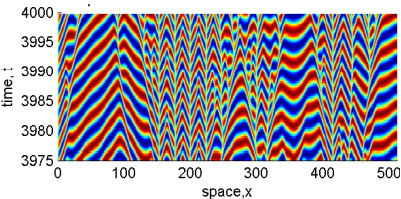

Two Types of Solution

- There are two types of solution for $|c| > 1.110468 \dots$

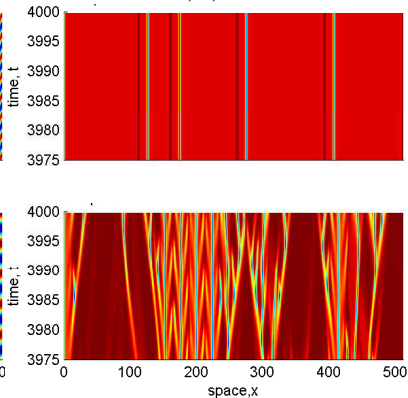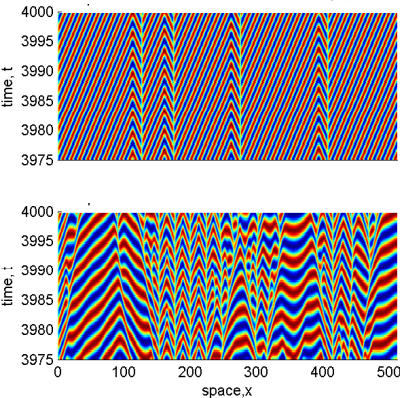


Convective and Absolute Stability

- There are two types of solution for $|c| > 1.110468\dots$
- The key concept for distinguishing these is “absolute stability”.



Convective and Absolute Stability

- There are two types of solution for $|c| > 1.110468\dots$
- The key concept for distinguishing these is “absolute stability”.
- In spatially extended systems, a solution can be unstable, but with any perturbation that grows also moving. This is “convective instability”.





Convective and Absolute Stability

- There are two types of solution for $|c| > 1.110468\dots$
- The key concept for distinguishing these is “absolute stability”.
- In spatially extended systems, a solution can be unstable, but with any perturbation that grows also moving. This is “convective instability”.
- Alternatively, a solution can be unstable with perturbations growing without moving. This is “**absolute instability**”.



Generation of Absolutely Stable and Unstable Wavetrains by Dirichlet Boundary Conditions

Numerical simulations show distinct behaviours in the absolutely stable and unstable parameter regimes

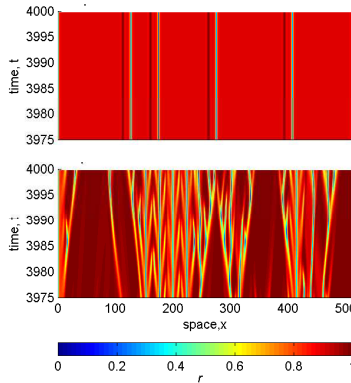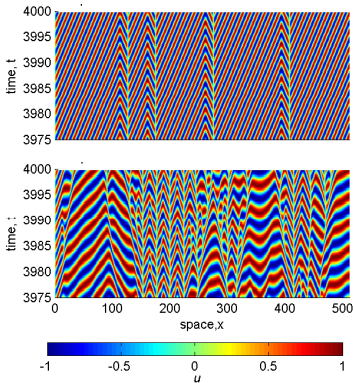

Convectively
unstable,
absolutely
stable



Absolutely
unstable

Outline

- 1 Wavetrains in the CGLE
- 2 Solutions in the Unstable Parameter Regime
- 3 Sources and Sinks**
- 4 Analytical Study of Source-Sink Patterns
- 5 Conclusions



Sources, Sinks, and Convective Instability

The solution in the convectively unstable but absolutely stable case is a pattern of “sources and sinks”.

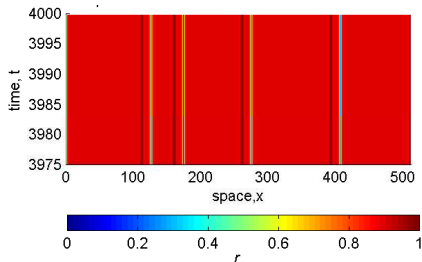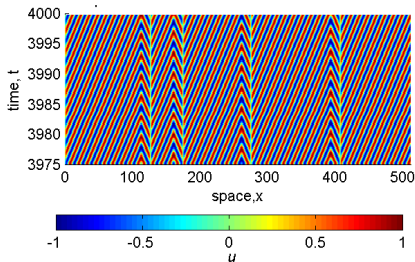

Sources, Sinks, and Convective Instability



The solution in the convectively unstable but absolutely stable case is a pattern of “sources and sinks”.

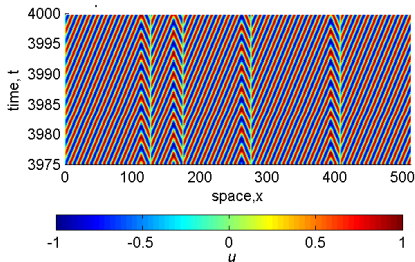

Note: sources and sinks are defined in terms of group velocity.

Sources, Sinks, and Convective Instability



The solution in the convectively unstable but absolutely stable case is a pattern of “sources and sinks”.

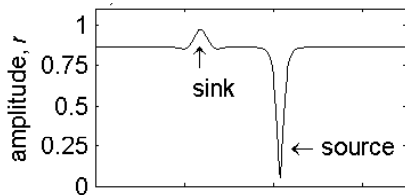

Note: sources and sinks are defined in terms of group velocity.

Sources, Sinks, and Convective Instability

The solution in the convectively unstable but absolutely stable case is a pattern of “sources and sinks”.

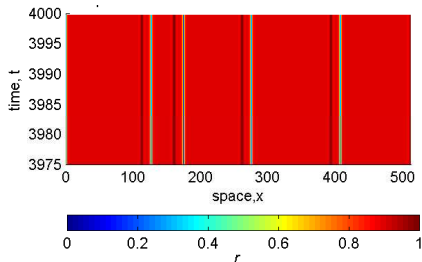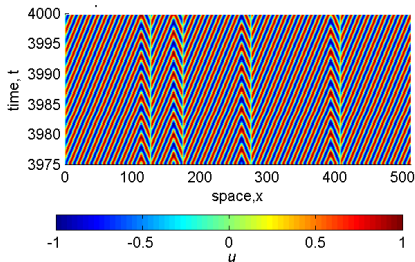


Question: How can an unstable wavetrain persist between the sources and sinks?

Sources, Sinks, and Convective Instability

Question: How can an unstable wavetrain persist between the sources and sinks?

Answer: Any growing perturbations moves, and is absorbed when it reaches a sink.

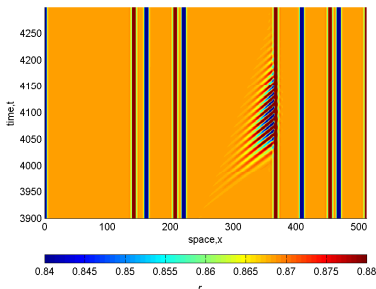


Previous Mathematical Work on Sources and Sinks

- Sources are “Nozaki–Bekki” holes (Nozaki & Bekki, Phys. Lett. A 110: 133-135, 1985), on which the literature is extensive (> 100 citations).
- Sinks are also well studied, though only numerically.
- But patterns of sources and sinks have received almost no attention.
- One open question is: are there constraints on the distances separating sources and sinks?


Numerical Study of Source-Sink Separations

- Step 1:** generate a source-sink pattern via a Dirichlet boundary condition
- Step 2:** extract a sink-source-sink triple
- Step 3:** transfer this part of the solution to a domain with zero Neumann boundary conditions
- Step 4:** translate the source and track the subsequent dynamics




Numerical Study of Source-Sink Separations

- Step 1:** generate a source-sink pattern via a Dirichlet boundary condition
- Step 2:** extract a sink-source-sink triple
- Step 3:** transfer this part of the solution to a domain with zero Neumann boundary conditions
- Step 4:** translate the source and track the subsequent dynamics




Numerical Study of Source-Sink Separations

- Step 1:** generate a source-sink pattern via a Dirichlet boundary condition
- Step 2:** extract a sink-source-sink triple
- Step 3:** transfer this part of the solution to a domain with zero Neumann boundary conditions
- Step 4:** translate the source and track the subsequent dynamics




Numerical Study of Source-Sink Separations

- Step 1:** generate a source-sink pattern via a Dirichlet boundary condition
- Step 2:** extract a sink-source-sink triple
- Step 3:** transfer this part of the solution to a domain with zero Neumann boundary conditions
- Step 4:** translate the source and track the subsequent dynamics




Numerical Study of Source-Sink Separations




Original solution

Numerical Study of Source-Sink Separations




Original solution




Solution with
translated source

Numerical Study of Source-Sink Separations




Original solution




Solution with
translated source

Numerical Study of Source-Sink Separations




Original solution




Solution with
translated source

Numerical Study of Source-Sink Separations



Original solution



Solution with
translated source

Numerical Study of Source-Sink Separations

Conclusion: source-sink separations appear to be constrained to a discrete set of possible values.

Next Step: analytical investigation of the separations.

Outline

- 1 Wavetrains in the CGLE
- 2 Solutions in the Unstable Parameter Regime
- 3 Sources and Sinks
- 4 Analytical Study of Source-Sink Patterns
- 5 Conclusions

Travelling Waves of Amplitude


For stationary source-sink patterns, substitute $r(x, t) = \hat{r}(x)$,
 $\theta_x(x, t) = \hat{\psi}(x)$

$$\implies d^2\hat{r}/dx^2 + \hat{r}(1 - \hat{r}^2 - \hat{\psi}^2) = 0$$

$$d\hat{\psi}/dx + K - c\hat{r}^2 + 2\hat{\psi}(d\hat{r}/dx)/\hat{r} = 0$$

(K is a constant of integration).

Solution Structure

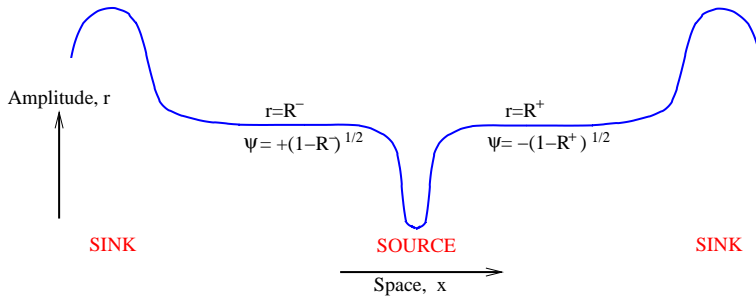

Based on source-sink patterns seen in numerical simulations,
we consider large separations.

Eigenvalue Structure of Isolated Sources and Sinks

Isolated sources and sinks satisfy

$$\begin{aligned}d^2\hat{r}/dx^2 + \hat{r}(1 - \hat{r}^2 - \hat{\psi}^2) &= 0 \\d\hat{\psi}/dx + K - c\hat{r}^2 + 2\hat{\psi}(d\hat{r}/dx)/\hat{r} &= 0.\end{aligned}$$

Eigenvalue Structure of Isolated Sources and Sinks

Isolated sources and sinks satisfy

$$\begin{aligned}d^2\hat{r}/dx^2 + \hat{r}(1 - \hat{r}^2 - \hat{\psi}^2) &= 0 \\d\hat{\psi}/dx + K - c\hat{r}^2 + 2\hat{\psi}(d\hat{r}/dx)/\hat{r} &= 0.\end{aligned}$$

Linearise about the wavetrain

⇒ isolated sources decay to the wavetrain at rate $\sqrt{2}$
& isolated sinks decay to the wavetrain at rate $1/\sqrt{2} \pm i\delta/4$

$$(\delta = \sqrt{11 - 12R^{*2}} \in \mathbb{R})$$

⇒ in patterns, the effect of sinks on sources dominates
the effect of sources on sinks, for large separations

⇒ we can just consider the correction to an isolated source:

Eigenvalue Structure of Isolated Sources and Sinks

Isolated sources and sinks satisfy

$$\begin{aligned}d^2\hat{r}/dx^2 + \hat{r}(1 - \hat{r}^2 - \hat{\psi}^2) &= 0 \\d\hat{\psi}/dx + K - c\hat{r}^2 + 2\hat{\psi}(d\hat{r}/dx)/\hat{r} &= 0.\end{aligned}$$

Linearise about the wavetrain

\Rightarrow isolated sources decay to the wavetrain at rate $\sqrt{2}$
& isolated sinks decay to the wavetrain at rate $1/\sqrt{2} \pm i\delta/4$

$$(\delta = \sqrt{11 - 12R^{*2}} \in \mathbb{R})$$

\Rightarrow in patterns, the effect of sinks on sources dominates
the effect of sources on sinks, for large separations

\Rightarrow we can just consider the correction to an isolated source:

Eigenvalue Structure of Isolated Sources and Sinks

Isolated sources and sinks satisfy

$$\begin{aligned}d^2\hat{r}/dx^2 + \hat{r}(1 - \hat{r}^2 - \hat{\psi}^2) &= 0 \\d\hat{\psi}/dx + K - c\hat{r}^2 + 2\hat{\psi}(d\hat{r}/dx)/\hat{r} &= 0.\end{aligned}$$

Linearise about the wavetrain

\Rightarrow isolated sources decay to the wavetrain at rate $\sqrt{2}$
& isolated sinks decay to the wavetrain at rate $1/\sqrt{2} \pm i\delta/4$

$$(\delta = \sqrt{11 - 12R^{*2}} \in \mathbb{R})$$

\Rightarrow in patterns, the effect of sinks on sources dominates
the effect of sources on sinks, for large separations

\Rightarrow we can just consider the correction to an isolated source:

Eigenvalue Structure of Isolated Sources and Sinks

Isolated sources and sinks satisfy

$$\begin{aligned} d^2\hat{r}/dx^2 + \hat{r}(1 - \hat{r}^2 - \hat{\psi}^2) &= 0 \\ d\hat{\psi}/dx + K - c\hat{r}^2 + 2\hat{\psi}(d\hat{r}/dx)/\hat{r} &= 0. \end{aligned}$$

Linearise about the wavetrain

⇒ isolated sources decay to the wavetrain at rate $\sqrt{2}$
 & isolated sinks decay to the wavetrain at rate $1/\sqrt{2} \pm i\delta/4$


$$(\delta = \sqrt{11 - 12R^{*2}} \in \mathbb{R})$$

⇒ in patterns, the effect of sinks on sources dominates
 the effect of sources on sinks, for large separations

⇒ we can just consider the correction to an **isolated source**:


$$r = R^* |\tanh(x/\sqrt{2})|$$

Perturbation Theory Calculation

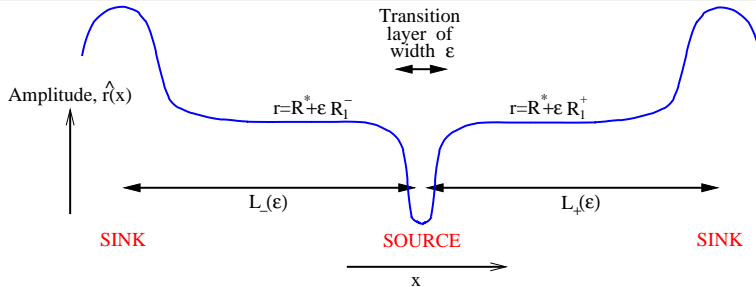

We study the problem using perturbation theory.

Perturbation Theory Calculation

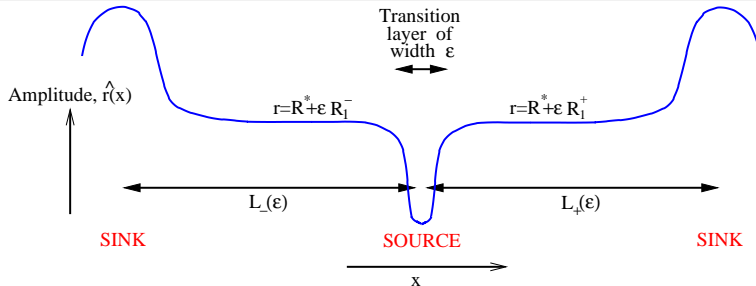


Key result (phase-locking condition):

$$\arg [\exp (-L_-(1+i \delta) / \sqrt{2})+\exp (-L_+(1+i \delta) / \sqrt{2})]=\text { constant } .$$


The constant is determined explicitly.

Illustration of the Locking Condition



$$\arg [\exp (-L_{-}(1+i \delta) / \sqrt{2})+\exp (-L_{+}(1+i \delta) / \sqrt{2})]=\text { constant }$$





Numerical Verification of the Analysis

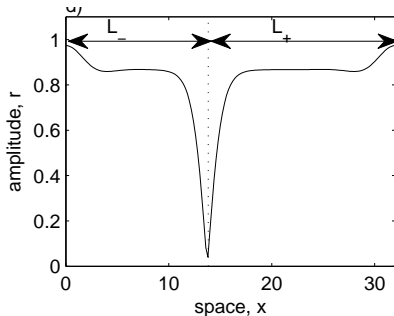

Numerical Verification of the Analysis

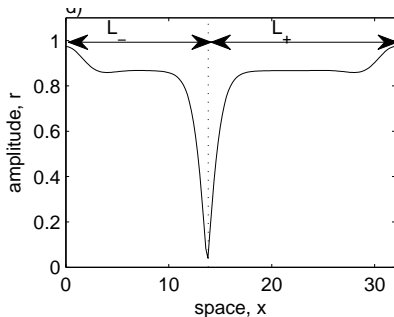

Numerical Verification of the Analysis

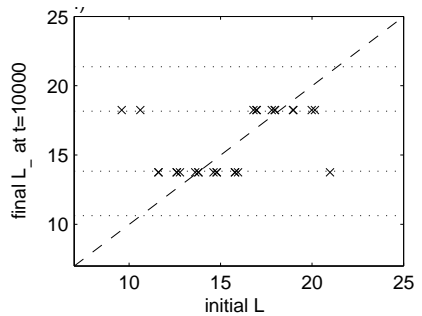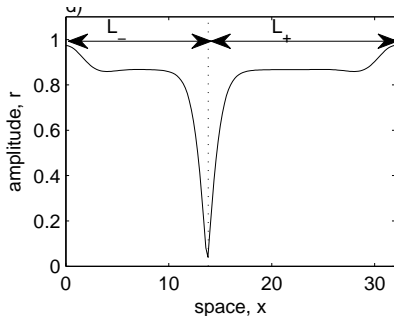

Outline

- 1 Wavetrains in the CGLE
- 2 Solutions in the Unstable Parameter Regime
- 3 Sources and Sinks
- 4 Analytical Study of Source-Sink Patterns
- 5 Conclusions

Summary of Main Results

Main Results:

- For behaviour induced by Dirichlet boundary conditions, the transition from a wavetrain to spatiotemporal disorder occurs via source-sink patterns.
- The separations between a source and its neighbouring sinks, L_- and L_+ , are constrained to lie on one of a discrete infinite sequence of curves in the $L_- - L_+$ plane (to leading order as velocity $\rightarrow 0$ and separations $\rightarrow \infty$).

Implications for Real Systems

Implications for Real Systems:

- Physics** ● Experiments are sufficiently precise that the prediction of discrete spacings are testable.
- Ecology** ● Empirical testing is not feasible.
 - In the convectively unstable parameter regime, wavetrains will only be detected in field data if the spatial scale of the data is small compared to source-sink separations.

Future Work and Publications

- Selection of source-sink separations from the discrete family by initial and boundary conditions
- Stability of source-sink patterns
- Higher order terms (sink-sink coupling)
- Extension to $b \neq 0$

M.J. Smith, J.D.M. Rademacher, J.A. Sherratt:

Absolute stability of wavetrains can explain spatiotemporal dynamics in reaction-diffusion systems of lambda-omega type.
SIAM J. Appl. Dyn. Systems 8, 1136-1159 (2009).

J.A. Sherratt, M.J. Smith, J.D.M. Rademacher:

Patterns of sources and sinks in the complex Ginzburg-Landau equation with zero linear dispersion.
SIAM J. Appl. Dyn. Systems 9, 883-918 (2010).

List of Frames

- 1 **Wavetrains in the CGLE**
 - The Complex Ginzburg-Landau Equation
 - Amplitude and Phase Equations
 - Wavetrain Generation by Dirichlet Bndy Conditions


- 2 **Solutions in the Unstable Parameter Regime**
 - Two Types of Solution
 - Convective and Absolute Stability
 - Generation of Absolutely Stable and Unstable Wavetrains

- 3 **Sources and Sinks**
 - Sources, Sinks, and Convective Instability
 - Literature on Sources and Sinks
 - Numerical Study of Source-Sink Separations


- 4 **Analytical Study of Source-Sink Patterns**
 - Travelling Waves of Amplitude
 - Solution Structure
 - Numerical Verification of the Analysis

- 5 **Conclusions**
 - Summary of Main Results
 - Implications for Real Systems
 - Future Work and Publications

Dependence of Source-Sink Separations on c

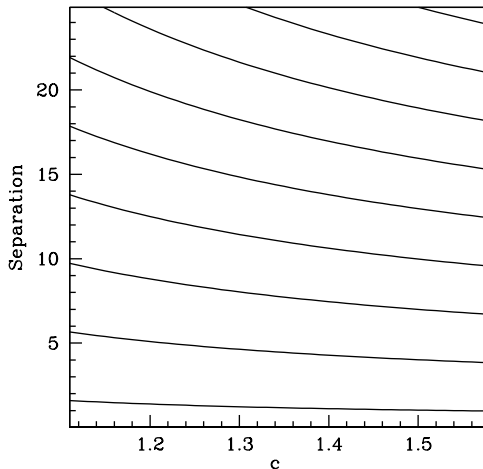

Detailed form of a Source-Sink Pair

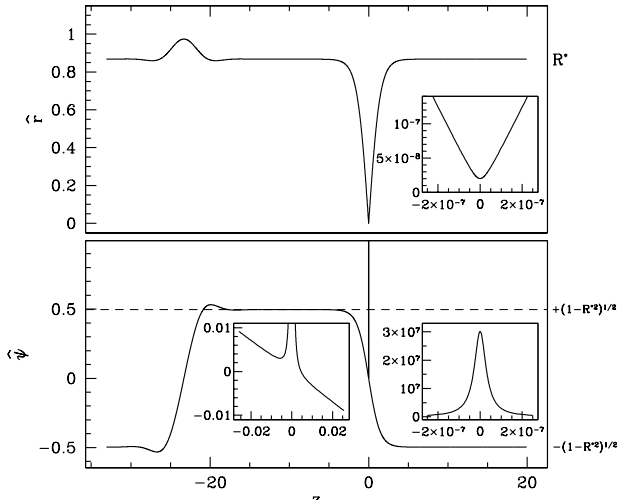


Experimental Observation of Sources and Sinks

Experimental systems in which sources and sinks have been observed include:

- chemical reactions
- electrochemical systems
- heated wire convection
- binary fluid convection
- convection waves generated by heating at a boundary
- the “printer’s instability”, in which the thin gap between two rotating acentric cylinders is filled with oil.


Movement of Sources and Sinks

These sources and sinks
appear to be stationary.....

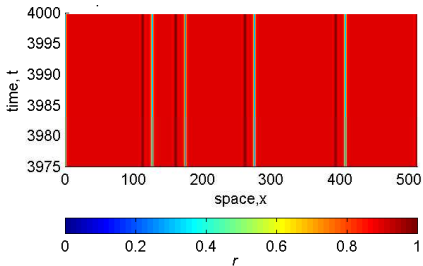


Movement of Sources and Sinks


These sources and sinks appear to be stationary.....

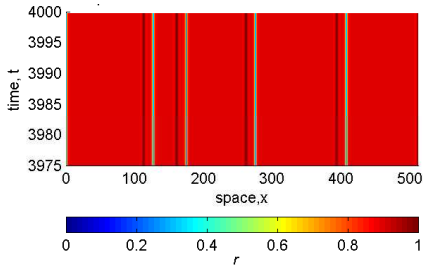

.....but very long simulations show that they move.

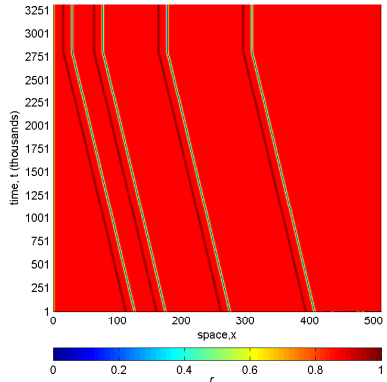


Perturbation Theory Calculation

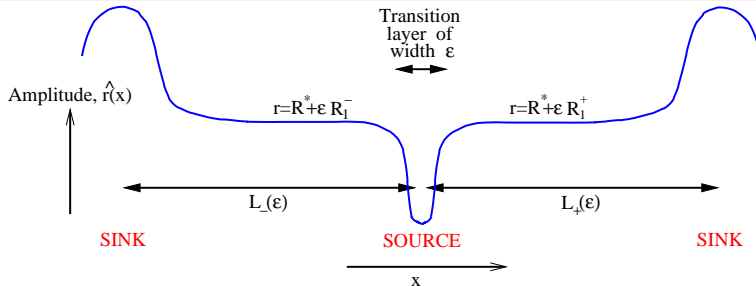

We study the problem using perturbation theory.

Perturbation Theory Calculation

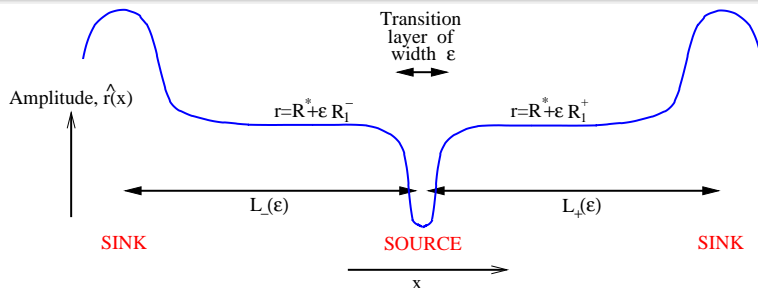

We study the problem using perturbation theory.


For $\epsilon = 0$:

$$K = (9 - \sqrt{81 + 72c^2}) / (4c)$$

$$\hat{r} = R^* |\tanh(x/\sqrt{2})|$$

$$\hat{\psi} = -(1 - R^{*2})^{1/2} \tanh(x/\sqrt{2})$$

Perturbation Theory Calculation

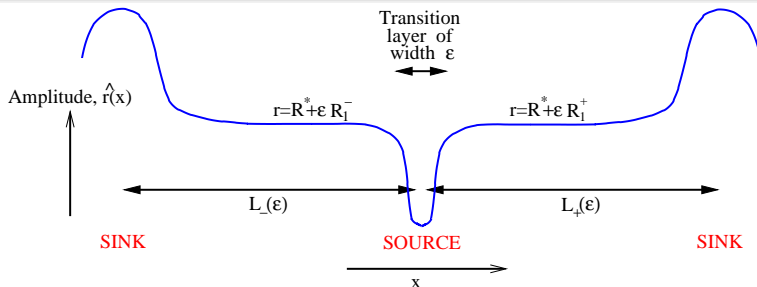

We study the problem using perturbation theory.


For $\epsilon \neq 0$:

$$K = (9 - \sqrt{81 + 72c^2})/(4c) + \epsilon K_1 + O(\epsilon^2)$$

$$\hat{r} = R^* |\tanh(x/\sqrt{2})| + \epsilon \hat{r}_1(x) + O(\epsilon^2)$$

$$\hat{\psi} = -(1 - R^{*2})^{1/2} \tanh(x/\sqrt{2}) + \epsilon \hat{\psi}_1(x) + O(\epsilon^2)$$

Perturbation Theory Calculation

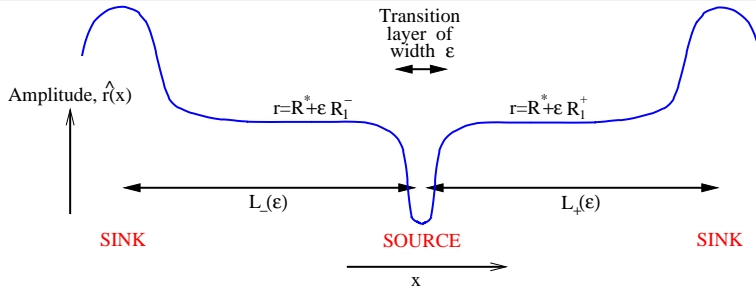

Key result (phase-locking condition):

$$\arg [\exp (-L_-(1+i \delta) / \sqrt{2})+\exp (-L_+(1+i \delta) / \sqrt{2})]=\text { constant } .$$

The constant is determined explicitly.